

# Flow assembly for O<sub>2</sub> measurement *FlowFit W COA 250*

## Assembly for unsupported installation in pipes or wall mounting



### Application

The flow assembly COA 250 has been developed specifically to hold the membrane-covered oxygen sensors COS 3, COS 3S or COS 4. This assembly is used wherever normal sensor immersion is either impossible or undesirable. In the case of pipes with large diameters or directly in measuring water lines of smaller diameters, the assembly should be installed in a bypass arrangement.

### Areas of application

- Waste water processing
- Drinking water
- Monitoring of surface waters
- Analysis stations


### Benefits at a glance

- Simple wall installation or unsupported installation in pipes
- Can be connected to pipes or hoses
- The inlet and outlet can be connected at the same level by fitting two standard 90-degree angles
- Automatic self-venting due to bottom inlet/top outlet design
- Quick oxygen sensor response is assured by inside volume dimensions
- Construction is insensitive to clogging
- Oxygen sensor can be easily removed for calibration in air
- Allows connection of a spray head for sensor membrane cleaning during operation



## Dimensions

Dimensions of  
flow assembly  
COA 250

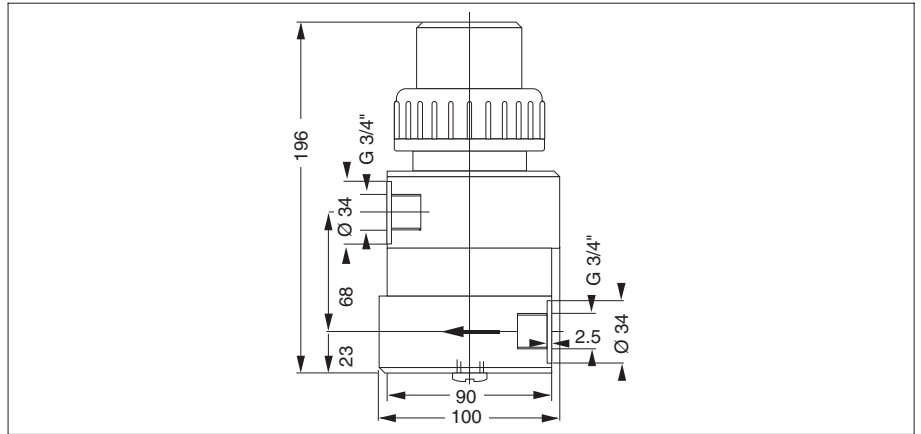

## Technical data

Materials of flow assembly . . . . .	PVC; O-ring made of EPDM
Dimensions . . . . .	Ø 100 x 195 mm (without sensor)
Measuring water connection . . . . .	internal G 3/4" thread
Connectors . . . . .	commercial G 3/4" fittings; an O-ring, ID 26, 57 W3, 53 can be installed for additional sealing
Max. permissible water pressure . . . . .	6 bar at 20 °C 3 bar at 50 °C
Recommended minimum flow . . . . .	100 l/h (with sensor COS 3 or COS 4) 500 l/h (with sensor COS 3S)
Recommended maximum flow . . . . .	1000 l/h
Max. operating temperature . . . . .	50 °C
Equipment mounting positions . . . . .	1 oxygen sensor COS 3, COS 3S or COS 4 1 spray head CUR 3

Subject to modifications.

## How to order

### Flow assembly FlowFit W COA 250

#### Version

A Material PVC

COA 250

← complete order code

## Accessories

- COY 250 pipe clamp for plate and wall installation
- CUR 3 spray head for cleaning purposes

**Order no.**  
50065132

## Supplementary documentation

- TI COS 3/COS 3S
- TI COS 4
- TI Chemoclean CYR 10/20

50057226  
50085981  
50014223

**Endress+Hauser GmbH+Co.**  
**Instruments International**  
P.O. Box 22 22  
D-79574 Weil am Rhein  
Tel. (0 76 21) 9 75 - 02  
Fax (0 76 21) 97 53 45

**Endress + Hauser**  
Nothing beats know-how

